


Ventile mit Innengewinde VG7x0x

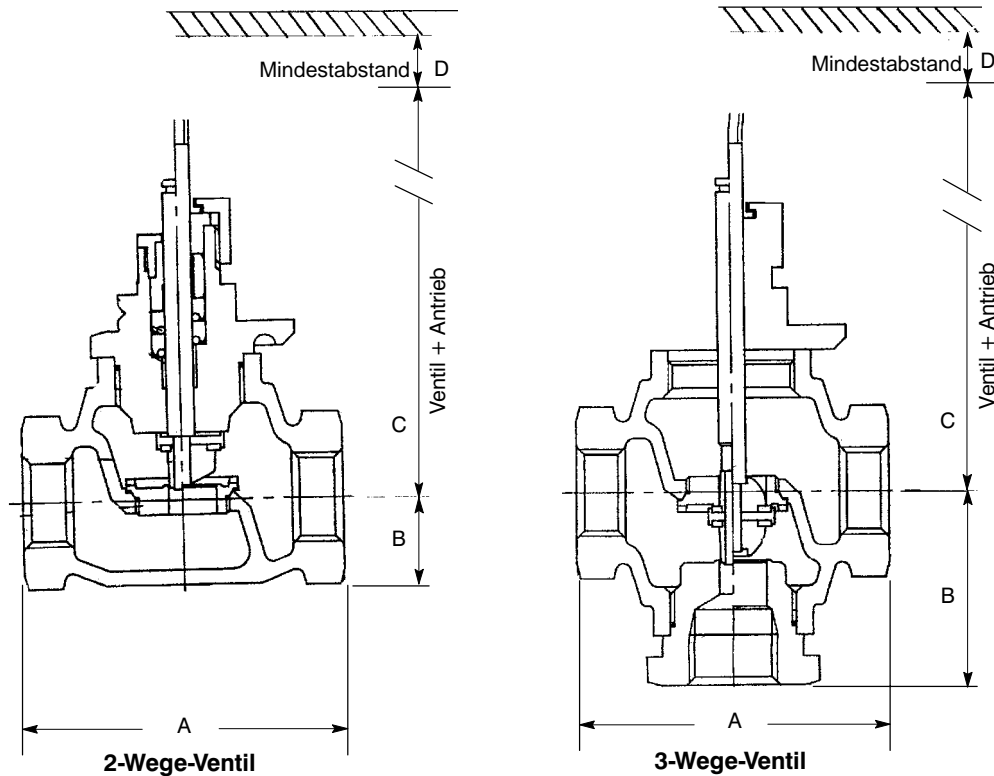


Abmessungen

Nennweite DN		15	20	25	32	40	50
A	NO / NC / Mischer	76	81	104	119	130	150
B	NO	21	24	29	34	55	53
	NC	39	41	44	51	70	72
	Mischer	46	54	65	70	85	95
C (S2)	VA-731x	127	127	—	—	—	—
	VA-715x	195	195	219	219	233	233
	VA-770x	195	195	219	219	233	233
	VA-774x	212	212	236	236	250	250
	VA-720x	—	—	244	244	252	273
	VA-724x	—	—	271	271	279	300
	M-9216	356	356	386	386	382	392
D (S2)	VA-731x	25	25	25	25	25	25
	VA-715x	64	64	64	64	64	64
	VA-770x	50	50	50	50	50	50
	VA-774x	33	33	33	33	33	33
	VA-720x	114	114	114	114	114	114
	VA-724x	114	114	114	114	114	114
C (S4)	VA-715x	214	219	228	234	239	244
	VA-770x	214	219	228	234	239	244
	VA-774x	231	231	245	251	256	261
	VA-720x	250	236	245	251	256	261
	VA-724x	—	—	272	278	283	288
	M-9216	373	378	387	393	399	403
D (S4)	VA-715x	64	64	64	64	64	64
	VA-770x	50	50	50	50	50	50
	VA-774x	33	33	33	33	33	33
	VA-720x	114	114	114	114	114	114
	VA-724x	114	114	114	114	114	114

Abbildung 755:
Abmessungen (mm) VG7x0x mit elektrischen Antrieben

Ventile mit Innengewinde VG7x0x

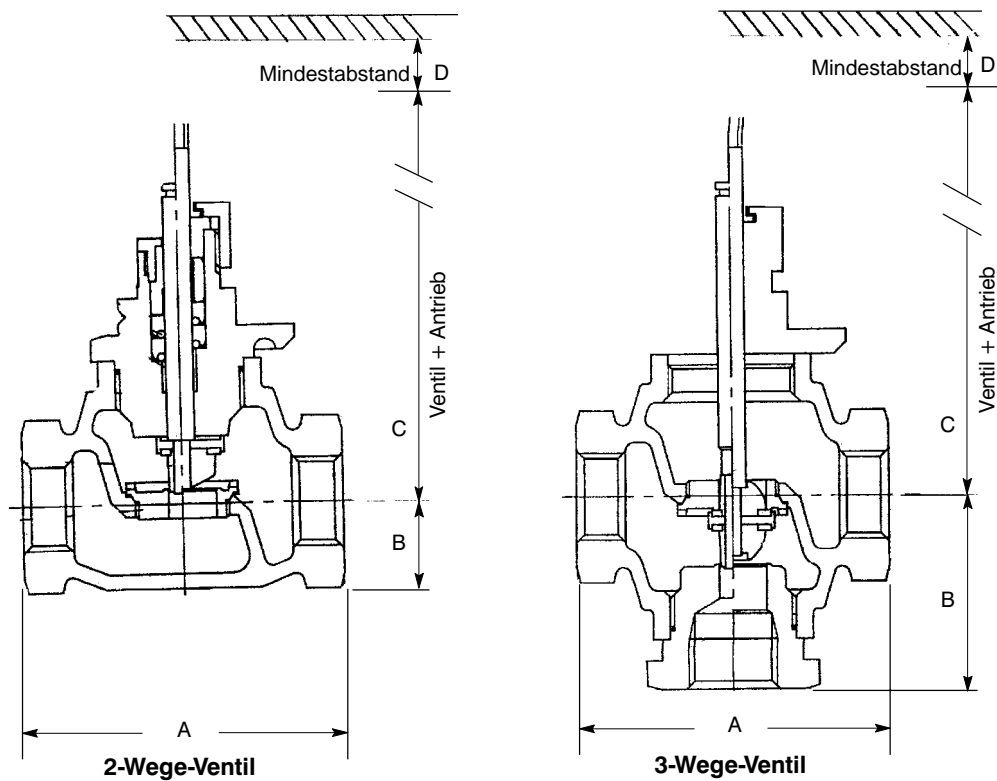

Abmessungen

Nennweite DN		15	20	25	32	40	50
A	NO / NC / Mischer	76	81	104	119	130	150
B	NO	21	24	29	34	55	53
	NC	39	41	44	51	70	72
	Mischer	46	54	65	70	85	95
C (S2)	V-3000-8001	120	120	147	149	151	157
	V-3801-8001	102	102	—	—	—	—
	V-400-800x	—	—	321	323	337	348
D (S2)	V-3000-8001	90	90	90	90	90	90
	V-3801-8001	60	60	60	60	60	60
	V-400-800x	87	87	87	87	87	87
C (S4)	V-3000-8001	138	138	152	158	—	—
	V-400-800x	330	335	340	350	355	360
D (S4)	alle Typen	90	90	90	90	90	90

Abbildung 756:
Abmessungen (mm) VG7x0x mit pneumatischen Antrieben